

**Part no. AS-1081-77012**





12-48 V, 700 lm, flood

## Specifications

<b>Voltage range (V), nominal</b>	12-48
<b>Voltage range (V), functional</b>	
<b>Power consumption (W)</b>	12
<b>Load capacity</b>	
<b>Temperature range (°C)</b>	-40 bis 65
<b>Brightness</b>	
<b>Brightness (raw lm)</b>	
<b>Brightness (effective lm)</b>	700
<b>Brightness (cd)</b>	
<b>Brightness (lx)</b>	
<b>Performance class</b>	bis 1000 lm eff.
<b>Beam pattern/lens</b>	Geländeausleuchtung
<b>Beam angle [°]</b>	
<b>Colour Temperature (K)</b>	
<b>Others</b>	
<b>Ingress protection</b>	IP67
<b>Resistivity</b>	

Part no. AS-1081-77012

## Dimensions

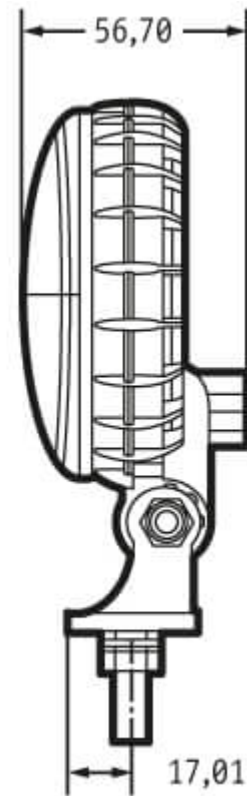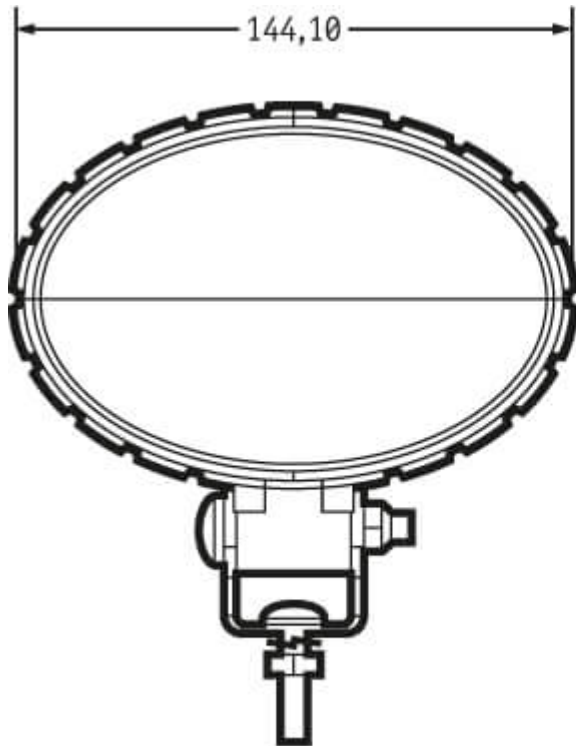

## Mounting

Mounting type	Universalhalterung, 5/16"-18x1"
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Deutsch-Stecker (DT04-2P)
Mating connector	Deutsch-Stecker (DT06-2S)
Reverse polarity protection	1
Black wire	Masse
Red wire	Arbeitsscheinwerfer

**Part no. AS-1081-77012**

## Others

<b>Material (Housing)</b>	Polycarbonat
<b>Material (Diffusing lens)</b>	Polycarbonat
<b>Color (Housing)</b>	Schwarz
<b>Color (Mount)</b>	
<b>Color (Diffusing lens)</b>	Weiß

## Variants

<b>AS-1081-77012</b>	12-48 V, 700 lm, Geländeausleuchtung
<b>AS-1082-77012</b>	12-48 V, 700 lm, Nahfeldausleuchtung
<b>AS-1083-77012</b>	12-48 V, 700 lm, Spot

## Accessories