


Part no. AS-2172-89111

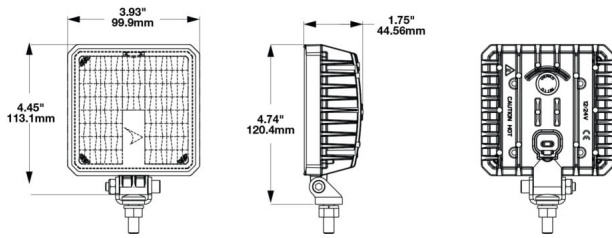


12-24 V, flood

Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	9-30
Power consumption (W)	44,16-52,56
Load capacity	
Temperature range (°C)	-40 bis 65
Brightness	
Brightness (raw lm)	6372
Brightness (effective lm)	3800
Brightness (cd)	5839
Brightness (lx)	
Performance class	über 3000 lm eff.
Beam pattern/lens	Geländeausleuchtung
Beam angle [°]	
Colour Temperature (K)	5050
Others	
Ingress protection	IP67 / IP69K
Resistivity	
Standards	
Electromagnetic Compatibility	ECE (Reg. 10)
Transient spike protection	330 V @ 1 Hz-100 Pulse

Dimensions

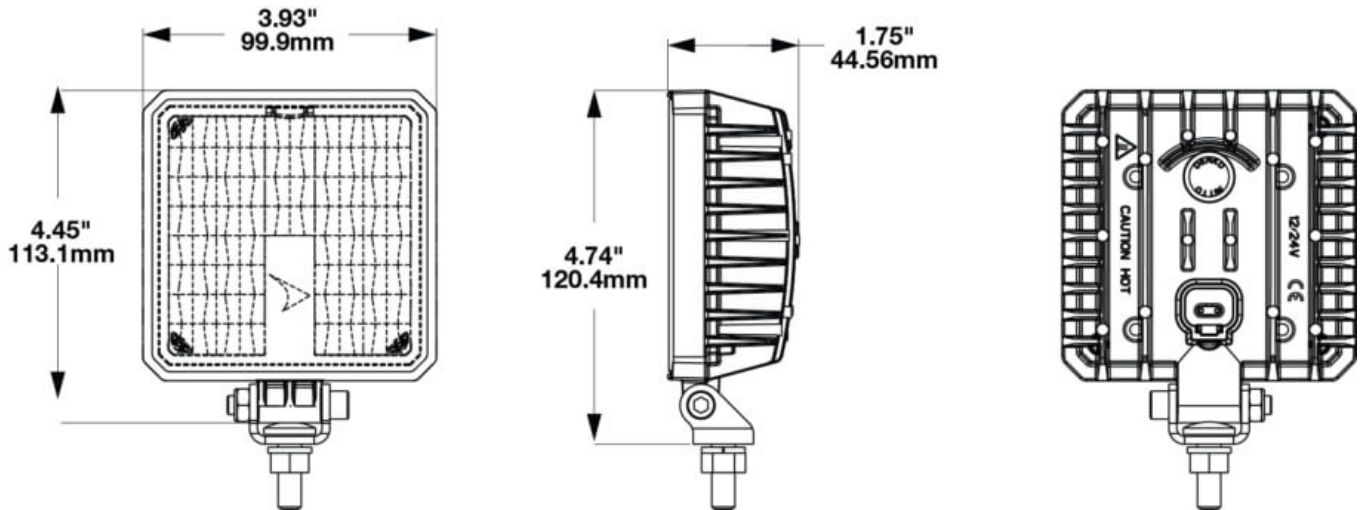

Mounting

Mounting type	Universalhalterung, 5/16"
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Deutsch-Stecker (DT04-2P)
Mating connector	Deutsch-Stecker (DT06-2S)
Reverse polarity protection	1
Black wire	Masse
Red wire	Arbeitsscheinwerfer

Part no. AS-2172-89111

Others

Material (Housing)	Aluminium
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Klar

Beam pattern

Variants

AS-2172-89111	12-24 V, Geländeausleuchtung
---------------	------------------------------

Accessories