

Part no. **ELK-2181-10021**




Addio 10024-8 ADV, 20-36 V, 100 A, with 8 inputs (4/8 digital, 4/8 analogue) and 8 outputs

Specifications

Voltage range (V), nominal	20-36
Voltage range (V), functional	
Power consumption (W)	
Load capacity	
Temperature range (°C)	
Brightness	
Brightness (raw lm)	
Brightness (effective lm)	
Brightness (cd)	
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	
Others	
Ingress protection	
Resistivity	

Dimensions

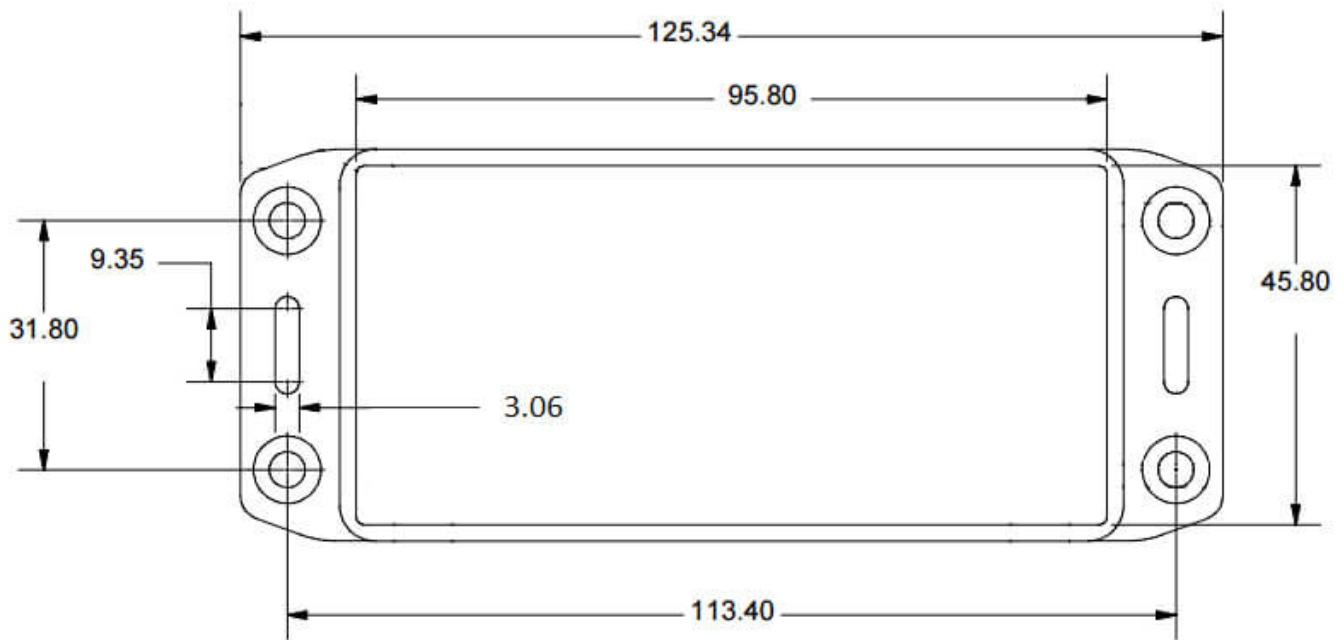

Mounting

Mounting type	Flachmontage
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Steckkontakte/Schraubklemmanschluss
Mating connector	
Reverse polarity protection	0

Others

Material (Housing)	
Material (Diffusing lens)	
Color (Housing)	
Color (Mount)	
Color (Diffusing lens)	

Variants

ELK-2032-90121	Addio 9012-8 ADV, 10-22 V, mit 8 Eingängen (4/8 analoge, 4/8 analog) und 8 Ausgängen
ELK-2048-90125	Addio 9012-8 ADV Bluetooth, Set aus Relaisbox (10-22 V, mit 8 Eingängen (4/8 analog, 4/8 digital)) und 8 Ausgängen) und Bluetooth-Modul (BLE 5.0 CAN)
ELK-2119-50241	Addio 5024-8 ADV, 20-36 V, 50 A, mit 8 Eingängen (4/8 digital, 4/8 analog) und 8 Ausgängen
ELK-2127-90021	Addio 9012-8 STD, 10-22 V, mit 8 Eingängen (8/8 digital, 4/8 analog) und 8 Ausgängen
ELK-2129-16021	Addio 1612-4-ADV, 10-22 V, 16 A, mit 6 Eingängen (6/6 digital, 2/6 analog) und 6 Ausgängen
ELK-2181-10021	Addio 10024-8 ADV, 20-36 V, 100 A, mit 8 Eingängen (4/8 digital, 4/8 analog) und 8 Ausgängen

Accessories