

Part no. FS-1292-90331




3 modules, 12 V, 1,500 lm, fog light

Specifications

Voltage range (V), nominal	12
Voltage range (V), functional	
Power consumption (W)	43,2
Load capacity	
Temperature range (°C)	-40 bis 65
Brightness	
Brightness (raw lm)	
Brightness (effective lm)	1500
Brightness (cd)	
Brightness (lx)	
Brightness (reference index)	
Performance class	
Beam pattern/lens	Nebellicht
Beam angle [°]	
Colour Temperature (K)	5000
Others	
Ingress protection	IP69K
Resistivity	
Standards	ECE (Reg. 19), SAE (J583)
Electromagnetic Compatibility	SAE (J1113)
Transient spike protection	

Part no. FS-1292-90331

Dimensions

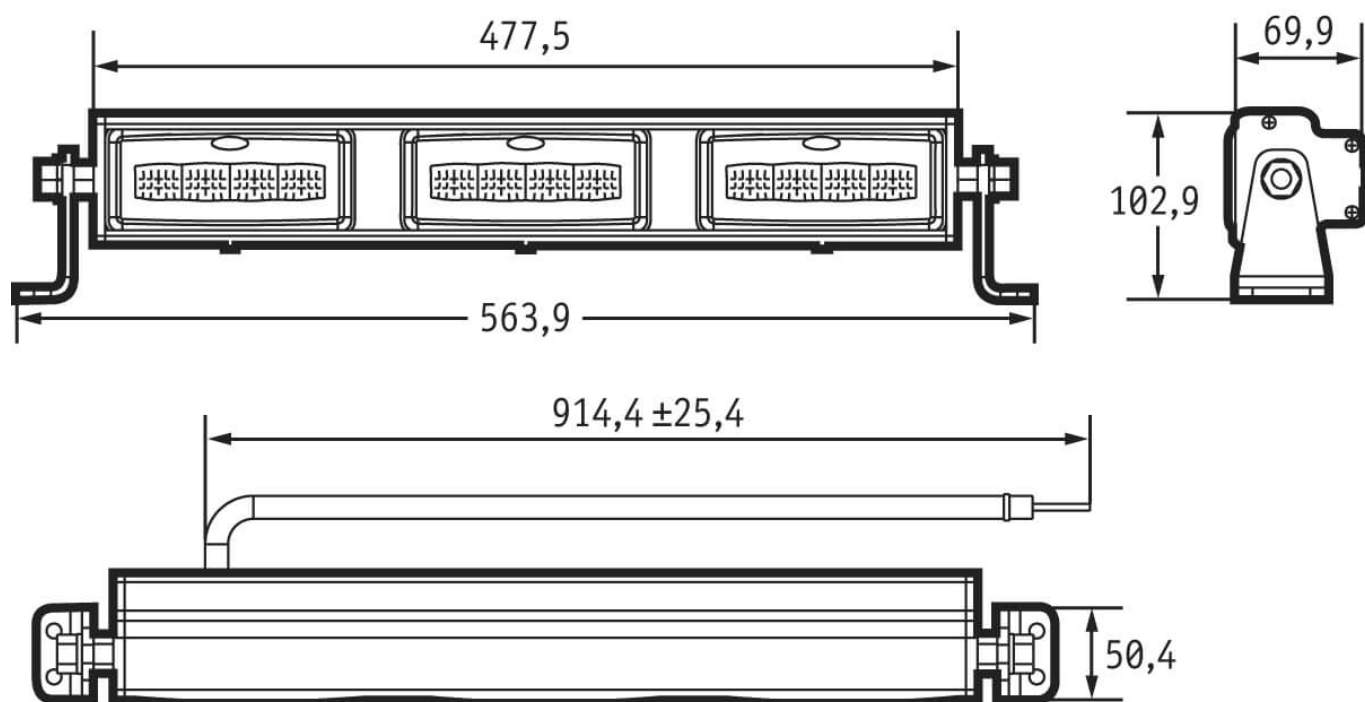

Mounting

Mounting type	Spez. Montagehalter
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	Kabel
Mating connector	
Reverse polarity protection	1
Black wire	Masse
Red wire	Nebelscheinwerfer

Part no. FS-1292-90331

Others

Material (Housing)	Aluminium
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	Schwarz
Color (Diffusing lens)	Klar

Beam pattern

Variants

FS-1292-90331	3 Module, 12 V, 1500 lm, Nebellicht
----------------------	-------------------------------------

Accessories