


LED-Fahrscheinwerfer Modell 8800 Evolution 2 SmartHeat

Part no. FS-1713-88311

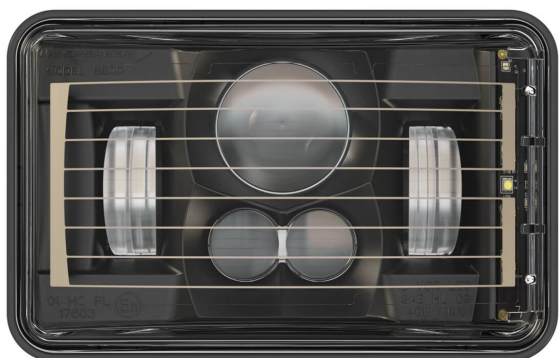

12-24 V, low beam, with heated lens, ECE road approval (Reg. 112), black bezel

Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	9-32
Power consumption (W)	39,6-40,0
Load capacity	
Temperature range (°C)	-40 bis 65
Brightness	
Brightness (raw lm)	2830
Brightness (effective lm)	782
Brightness (cd)	29800
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	5000
Others	
Ingress protection	IP69K
Resistivity	

Dimensions

Mounting

Mounting type	Einbau
Installation dimensions/diameter [mm]	
Installation depth [mm]	
Connector	AMP (172615-2, H4-Stecker)
Mating connector	AMP (172796-1)
Reverse polarity protection	1
Black wire	Masse
White wire	Abblendlicht

LED-Fahrscheinwerfer Modell 8800 Evolution 2 SmartHeat

Part no. FS-1713-88311

Others

Material (Housing)	Aluminium
Material (Diffusing lens)	Polycarbonat
Color (Housing)	Schwarz
Color (Mount)	Schwarz
Color (Diffusing lens)	Klar

Variants

FS-1713-88311	12-24 V, Abblendlicht, mit beheizter Frontscheibe, ECE-Straßenzulassung (Reg. 112), schwarze Einfassung
FS-1714-88312	12-24 V, Abblendlicht, mit beheizter Frontscheibe, ECE-Straßenzulassung (Reg. 112), verchromte Einfassung
FS-1715-88321	12-24 V, Fernlicht, mit beheizter Frontscheibe, ECE-Straßenzulassung (Reg. 112), schwarze Einfassung
FS-1716-88322	12-24 V, Fernlicht, mit beheizter Frontscheibe, ECE-Straßenzulassung (Reg. 112), verchromte Einfassung

Accessories