

Part no. **SS-316-51248**




12-48 V

Specifications

Voltage range (V), nominal	12-48
Voltage range (V), functional	
Power consumption (W)	
Load capacity	
Temperature range (°C)	
Brightness	
Brightness (raw lm)	
Brightness (effective lm)	
Brightness (cd)	
Brightness (lx)	
Performance class	
Beam pattern/lens	
Beam angle [°]	
Colour Temperature (K)	
Others	
Ingress protection	
Resistivity	

Dimensions

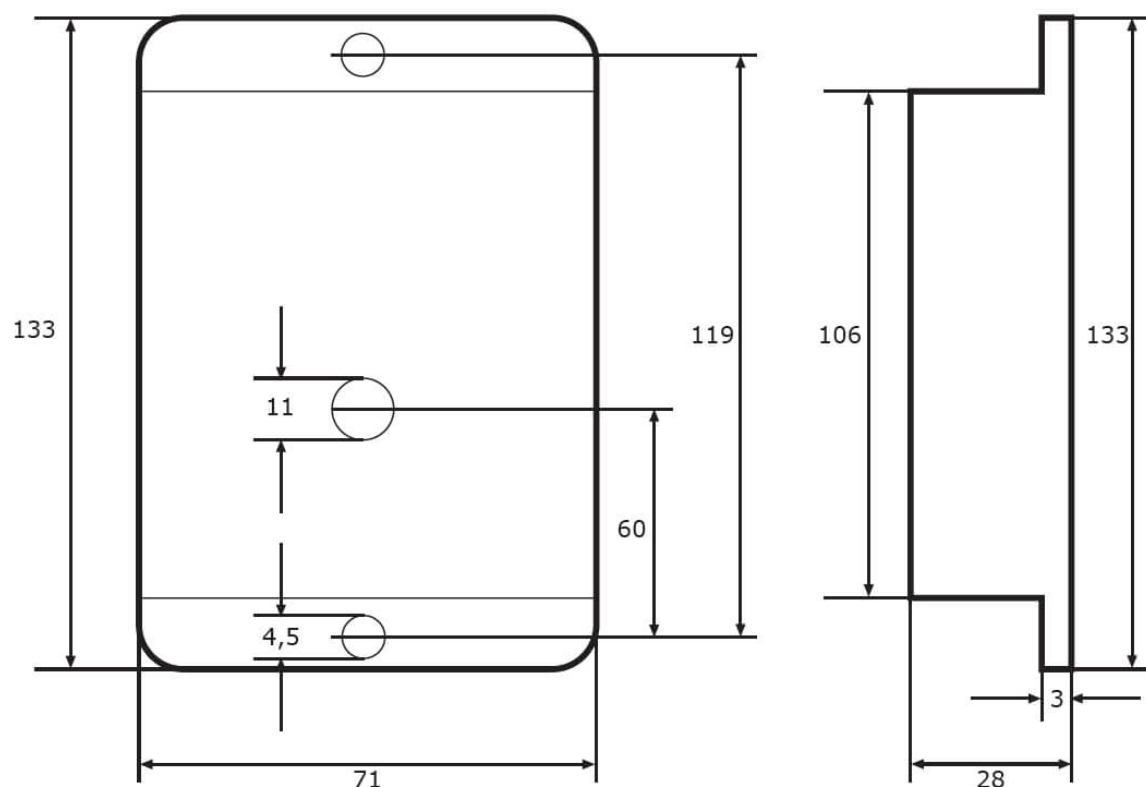

Mounting

Mounting type	
Installation dimensions/diameter [mm]	71x106
Installation depth [mm]	
Connector	
Mating connector	
Reverse polarity protection	0

Part no. SS-316-51248

Others

Material (Housing)	ABS-Kunststoff
Material (Diffusing lens)	
Color (Housing)	
Color (Mount)	
Color (Diffusing lens)	

Variants

SS-307-50099	12-90 V, 99 verschiedene Codes programmierbar
SS-316-51248	12-48 V

Accessories