

Part no. SS-985-47138





with turn knob (red), with re-start-inhibitor

Specifications

Voltage range (V), nominal	12-24
Voltage range (V), functional	
Load capacity	
Temperature range (°C)	-40 bis 90
Working life	>50.000 / >100.000 Arbeitszyklen (elektr./mechan.)
Key code	Drehknopf
Positions	AUS-AN-Start
Key removable	
Others	
Ingress protection	IP54 (schlüsselseitig)
Resistivity	Vibration 3 g 10-500 Hz
Standards	
Electromagnetic Compatibility	
Transient spike protection	

Part no. SS-985-47138

Dimensions

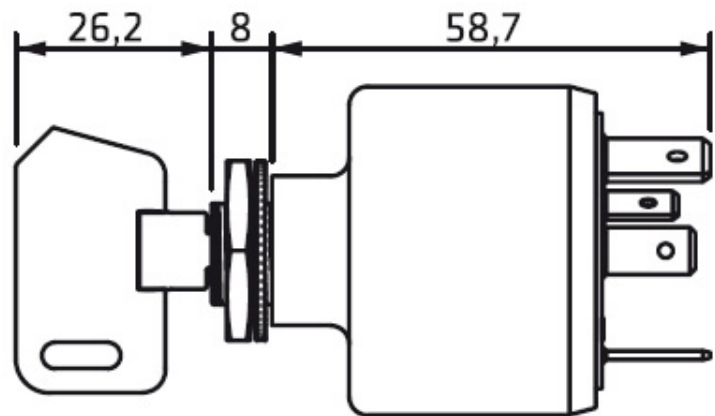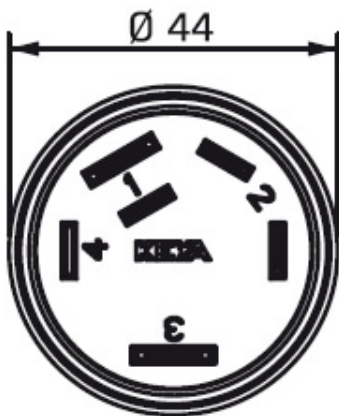

Mounting

Mounting type	Einbau
Installation dimensions/diameter [mm]	16,5 / 44
Installation depth [mm]	58,7
Connector	Steckkontakte
Mating connector	

Part no. SS-985-47138

Others

Material (Housing)

Color (Housing)

Variants

SS-985-47138

mit Drehknopf (rot), mit Anlasswiederhol Sperre

Accessories