

**Part no. TL-2262-26411**


12-24 V, stop, tail and turn light, with backup light, ECE road approval

## Specifications

<b>Voltage range (V), nominal</b>	12-24
<b>Voltage range (V), functional</b>	9-32
<b>Power consumption (W)</b>	3,87-4,27 (Brems), 1,12-1,97 (Blinker), 3,83-4,24 (Nebel), 0,32-0,62 (Schluss), 3,96-4,75 (Rückfahr)
<b>Load capacity</b>	
<b>Temperature range (°C)</b>	-40 bis 85
<b>Brightness</b>	
<b>Brightness (raw lm)</b>	1400
<b>Brightness (effective lm)</b>	
<b>Brightness (cd)</b>	
<b>Brightness (lx)</b>	
<b>Brightness (reference index)</b>	
<b>Performance class</b>	
<b>Beam pattern/lens</b>	
<b>Beam angle [°]</b>	
<b>Colour Temperature (K)</b>	
<b>Others</b>	
<b>Ingress protection</b>	
<b>Resistivity</b>	
<b>Standards</b>	ECE (Reg, 148 -2a/F1/S1/AR/R1)
<b>Electromagnetic Compatibility</b>	
<b>Transient spike protection</b>	

**Part no. TL-2262-26411**

## Dimensions

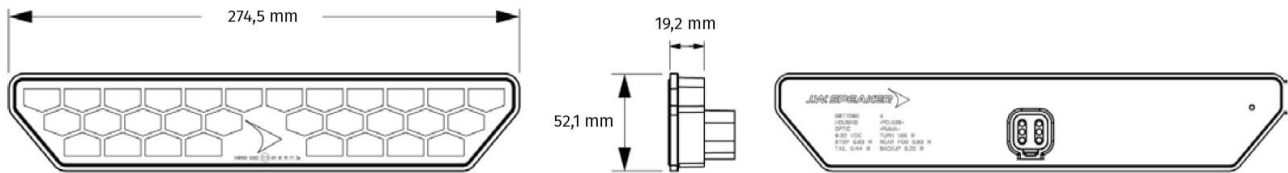

## Mounting

<b>Mounting type</b>	Einbau
<b>Installation dimensions/diameter [mm]</b>	
<b>Installation depth [mm]</b>	
<b>Connector</b>	Deutsch-Stecker (DT06-6S)
<b>Mating connector</b>	Deutsch-Stecker (DT04-6P)
<b>Reverse polarity protection</b>	1
<b>Socket</b>	
<b>Black wire</b>	Masse
<b>Red wire</b>	Schlusslicht
<b>Yellow wire</b>	Bremslicht
<b>White wire</b>	Fahrtrichtungsanzeiger

**Part no. TL-2262-26411**

## Others

Material (Housing)	Polycarbonat/ABS
Material (Diffusing lens)	Acryl (PMMA)
Color (Housing)	Schwarz
Color (Mount)	
Color (Diffusing lens)	Klar

## Beam pattern

## Variants

TL-2262-26411	12-24 V, Brems- und Schlusslicht, mit Fahrtrichtungsanzeiger, Nebelschlussleuchte und Rückfahrlicht, ECE-Straßenzulassung
---------------	---

## Accessories